


Outdoor LED floodlight.


Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.

Standard gear: electronic ballast 230V.

Louvers and diffusers: Matt satin symmetric aluminium reflector.




MADE IN ITALY

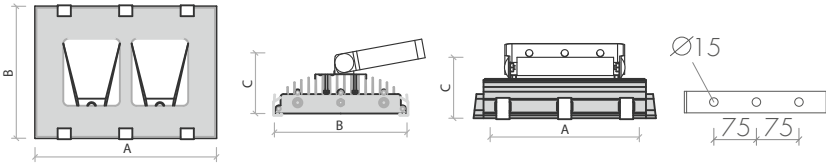

MOD.	W _{tot}	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	58	8061AR4058EL	2 led HP	4000	7566	6052	385	280	150	6,5	0,022	1	90
	58	8061AR5058EL	2 led HP	5000	7656	6124	385	280	150	6,5	0,022	1	90
	80	8061AR4080EL	2 led HP	4000	10162	8129	385	280	150	6,5	0,022	1	90
	80	8061AR5080EL	2 led HP	5000	10286	8228	385	280	150	6,5	0,022	1	90
	115	8061AR4115EL	2 led HP	4000	15110	12088	385	280	150	6,5	0,022	1	90
	115	8061AR5115EL	2 led HP	5000	15295	12235	385	280	150	6,5	0,022	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

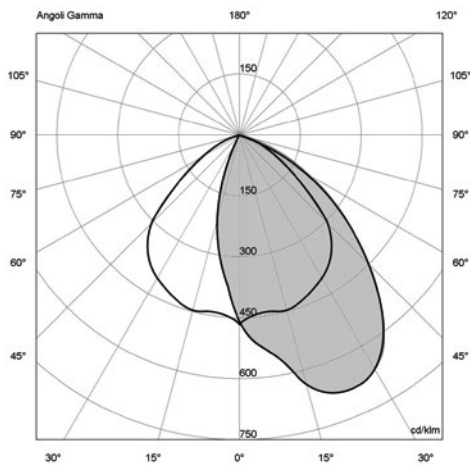

Optic type: Asymetric

Angle: 90°

OPTIONS



COD. V101
Vetro infrangibile



COD. AP01
Attacco palo