


Outdoor LED floodlight.


**Body:** trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.

**Standard gear:** electronic ballast 230V.

**Louvers and diffusers:** Matt satin symmetric aluminium reflector.




MADE IN ITALY

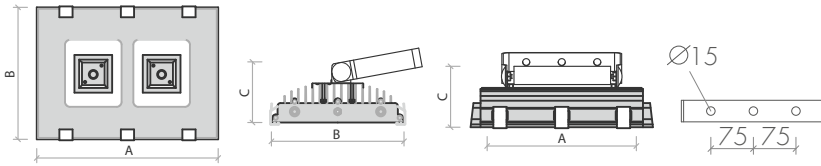

MOD.	W <sub>tot</sub>	Cod. EL	lamp	°K	Lm (T <sub>c</sub> =25°)	Lm (Output)	A	B	C	Kg	mc		
PR	58	8061PR4058EL	2 led HP	4000	7566	6431	385	280	150	6,5	0,022	1	90
	58	8061PR5058EL	2 led HP	5000	7656	6507	385	280	150	6,5	0,022	1	90
	80	8061PR4080EL	2 led HP	4000	10162	8637	385	280	150	6,5	0,022	1	90
	80	8061PR5080EL	2 led HP	5000	10286	8743	385	280	150	6,5	0,022	1	90
	115	8061PR4115EL	2 led HP	4000	15110	12843	385	280	150	6,5	0,022	1	90
	115	8061PR5115EL	2 led HP	5000	15295	12999	385	280	150	6,5	0,022	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

## PHOTOMETRIC DATA

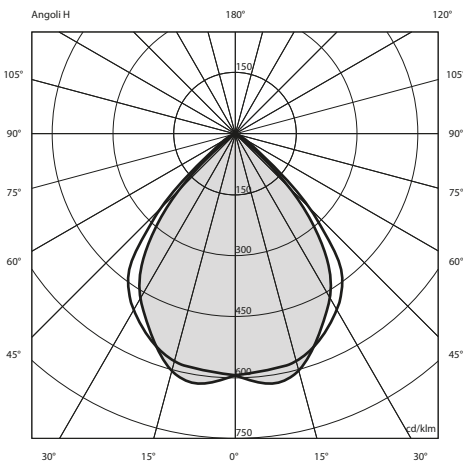

Optic type: Symetric

Angle: 90°

## OPTIONS



COD. VIO1  
Vetro infrangibile



COD. AP01  
Attacco palo