


Indoor and outdoor LED floodlight.


**Body:** trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.

**Standard gear:** electronic ballast 230V.

**Louvers and diffusers:** Matt satin symmetric aluminium reflector.




MADE IN ITALY

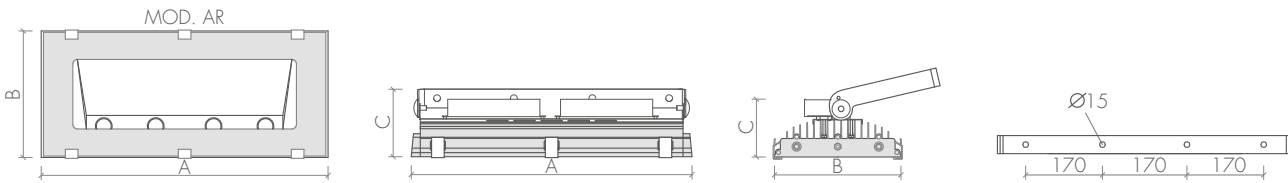

MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	320	8096AR4320EL	4 led HP	4000	46048	36838	635	280	150	10,5	0,040	1	40
	320	8096AR5320EL	4 led HP	5000	46608	37286	635	280	150	10,5	0,040	1	40
	380	8096AR4380EL	4 led HP	4000	53356	42684	635	280	150	11,5	0,040	1	40
	380	8096AR5380EL	4 led HP	5000	54008	43206	635	280	150	11,5	0,040	1	40

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

## PHOTOMETRIC DATA

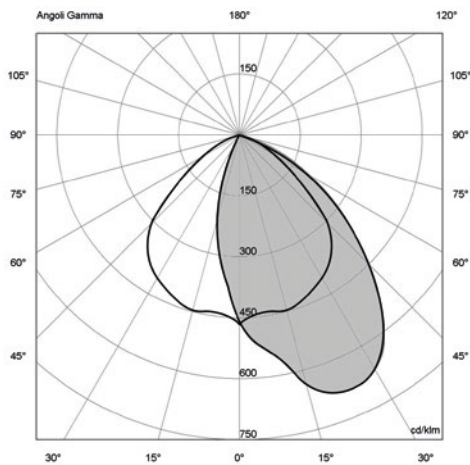

Optic type: Asymmetric

Angle: 90°

## OPTIONS



COD. VIO1  
Vetro infrangibile



COD. LM  
Alimentatore Dimmerabile 1-10V