


Indoor and outdoor LED floodlight.


Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.

Standard gear: electronic ballast 230V.

Louvers and diffusers: Matt satin symmetric aluminium reflector.




MADE IN ITALY

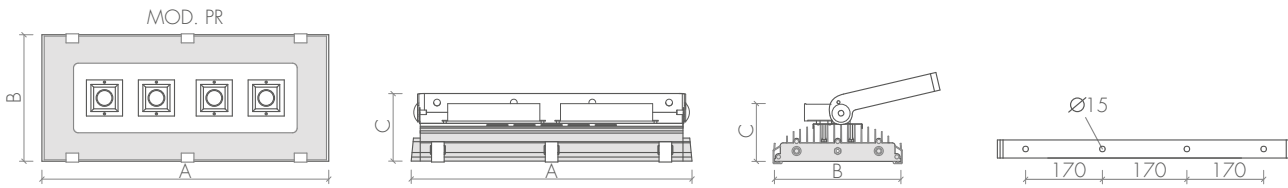

MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
PR	320	8096PR4320EL	4 led HP	4000	46048	39140	635	280	150	10,5	0,040	1	40
	320	8096PR5320EL	4 led HP	5000	46608	39616	635	280	150	10,5	0,040	1	40
	380	8096PR4380EL	4 led HP	4000	53356	45352	635	280	150	11,5	0,040	1	40
	380	8096PR5380EL	4 led HP	5000	54008	45906	635	280	150	11,5	0,040	1	40

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

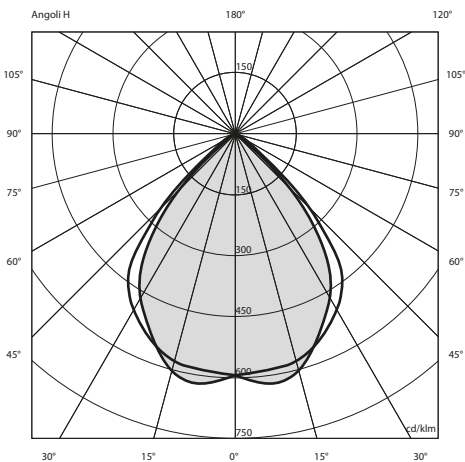

Optic type: Symetric

Angle: 90°

OPTIONS



COD. VIO1
Vetro infrangibile



COD. IM
Alimentatore Dimmerabile 1-10V