


Indoor and outdoor LED floodlight, usable for large areas, sports areas.


Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket.

Standard gear: electronic ballast 230V.

Louvers and diffusers: Matt satin symmetric aluminium reflector.




MADE IN ITALY

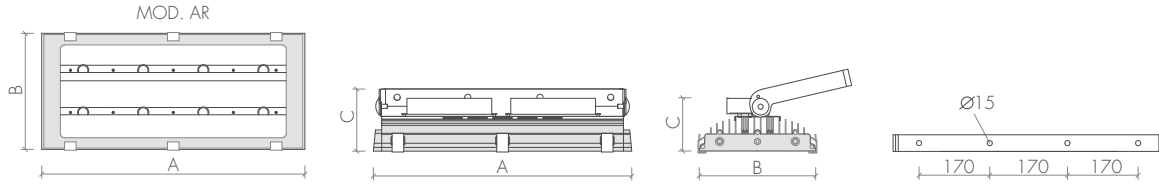

MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	480	8097AR4480EL	8 led HP	4000	64112	51289	635	280	150	13,5	0,040	1	40
	480	8097AR5480EL	8 led HP	5000	64896	51916	635	280	150	13,5	0,040	1	40

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

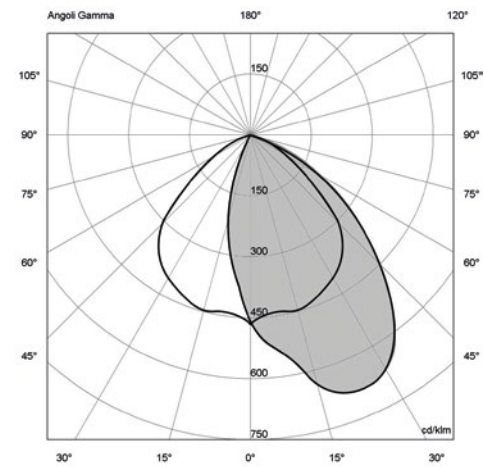

Optic type: Asymetric

Angle: 90°

OPTIONS



COD. V101
Vetro infrangibile