


Indoor and outdoor LED floodlight.


**Body:** trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips opening.

**Standard gear:** electronic ballast 230V.

**Louvers and diffusers:** Matt satin symmetric aluminium reflector.




MADE IN ITALY

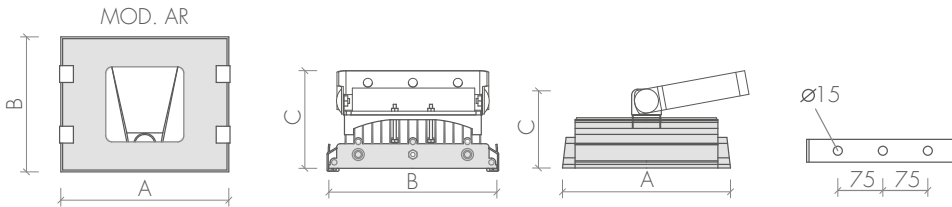

| MOD. | W  | Cod. EL      | lamp     | °K   | Lm (Tc=25°) | Lm (Output) | A   | B   | C   | Kg  | mc    |   |    |
|------|----|--------------|----------|------|-------------|-------------|-----|-----|-----|-----|-------|---|----|
| AR   | 40 | 8093AR4040EL | 1 led HP | 4000 | 5514        | 4411        | 280 | 225 | 125 | 4,5 | 0,022 | 1 | 90 |
|      | 40 | 8093AR5040EL | 1 led HP | 5000 | 5581        | 4464        | 280 | 225 | 125 | 4,5 | 0,022 | 1 | 90 |

| OPERATING TEMP. | CRI (RA) | LIFE (h) | DEGRADATION INDEX | POWER SUPPLY     | NORMS                 |
|-----------------|----------|----------|-------------------|------------------|-----------------------|
| -30+45°C        | 80       | >50 000h | L70 - LM80-TM21   | 230-240V 50/60Hz | EN / IEC 60598-1:2008 |

## PHOTOMETRIC DATA

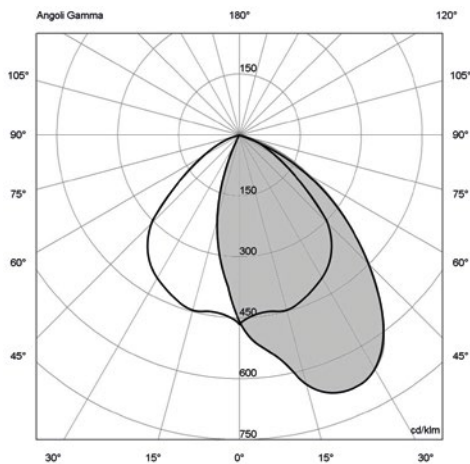

Optic type: Asymmetric

Angle: 90°

## OPTIONS



COD. VI01  
Vetro infrangibile



COD. AP01  
Attacco palo