

Art.


8093-PR

MICRO-PRINCE


Proiettore/Floodlight

series **prince**

Indoor and outdoor LED floodlight.

Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips opening.**Standard gear:** electronic ballast 230V.**Louvers and diffusers:** Matt satin symmetric aluminium reflector.

MADE IN ITALY

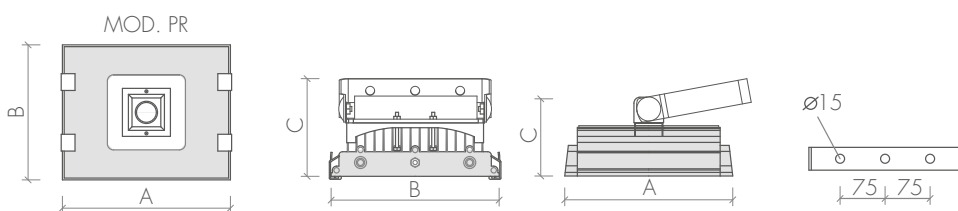

MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
PR	40	8093PR4040EL	1 led HP	4000	5514	4686	280	225	125	4,5	0,022	1	90
	40	8093PR5040EL	1 led HP	5000	5581	4743	280	225	125	4,5	0,022	1	90

OPERATING TEMP.

-30+45°C

CRI (RA)

80

LIFE (h)

>50 000h

DEGRADATION INDEX

L70 - LM80-TM21


POWER SUPPLY

230-240V 50/60Hz

NORMS

EN / IEC 60598-1:2008

PHOTOMETRIC DATA

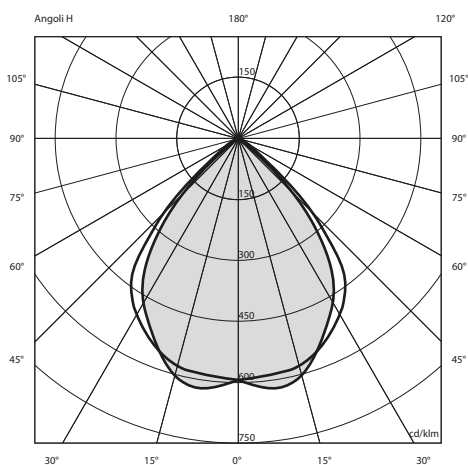

Optic type: Symmetric

Angle: 90°

OPTIONS

COD. V101
Vetro infrangibileCOD. AP01
Attacco palo

TEC-MAR®