


Indoor and outdoor LED floodlight.


Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips opening.

Standard gear: electronic ballast 230V.

Louvers and diffusers: Matt satin symmetric aluminium reflector.




MADE IN ITALY

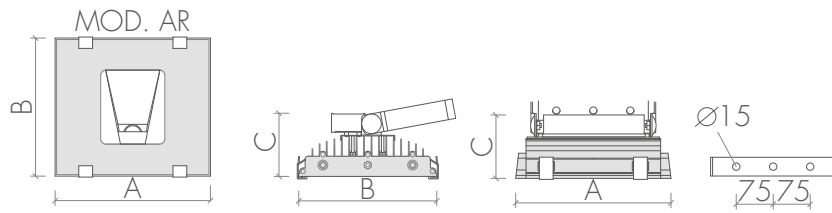

MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	55	8094AR4055EL	1 led HP	4000	7115	5692	315	280	150	6,5	0,022	1	90
	55	8094AR5055EL	1 led HP	5000	7202	5761	315	280	150	6,5	0,022	1	90
	80	8094AR4080EL	1 led HP	4000	10664	8531	315	280	150	6,5	0,022	1	90
	80	8094AR5080EL	1 led HP	5000	10793	8634	315	280	150	6,5	0,022	1	90
	120	8094AR4120EL	1 led HP	4000	14017	11213	315	280	150	6,5	0,022	1	90
	120	8094AR5120EL	1 led HP	5000	14187	11349	315	280	150	6,5	0,022	1	90
	150	8094AR4150EL	1 led HP	4000	19579	15663	315	280	150	6,5	0,022	1	90
	150	8094AR5150EL	1 led HP	5000	19818	15854	315	280	150	6,5	0,022	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

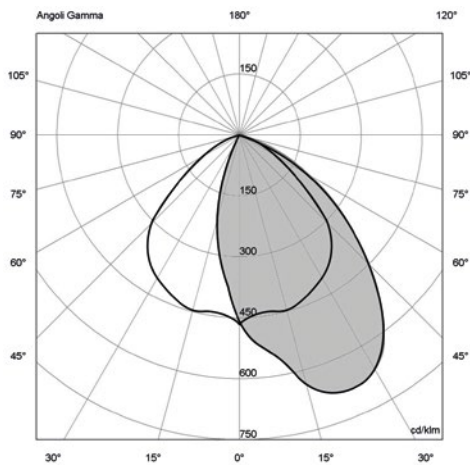

Optic type: Asymmetric

Angle: 90°

OPTIONS



COD. VIO1
Vetro infrangibile



COD. APO1
Attacco palo



COD. IM
Alimentatore Dimmerabile 1-10V