


Indoor and outdoor LED floodlight.


**Body:** trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.

**Standard gear:** electronic ballast 230V.

**Louvers and diffusers:** Matt satin symmetric aluminium reflector.




MADE IN ITALY

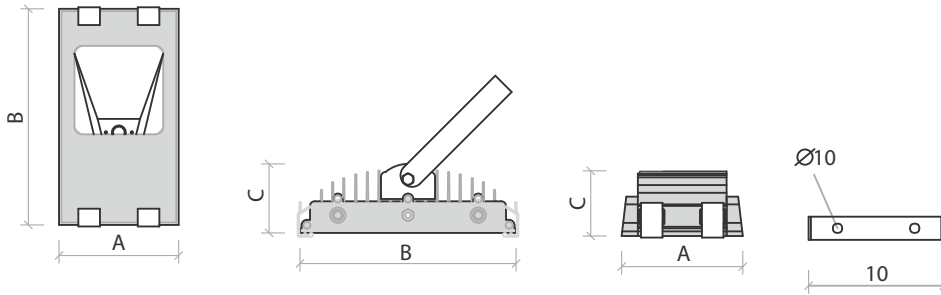

MOD.	Wtot	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	30	8060AR4030EL	1 led HP	4000	3556	2844	155	280	100	2,3	0,012	1	90
	30	8060AR5030EL	1 led HP	5000	3599	2879	155	280	100	2,3	0,012	1	90
	40	8060AR4040EL	1 led HP	4000	5081	4064	155	280	100	2,3	0,012	1	90
	40	8060AR5040EL	1 led HP	5000	5153	4122	155	280	100	2,3	0,012	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

## PHOTOMETRIC DATA

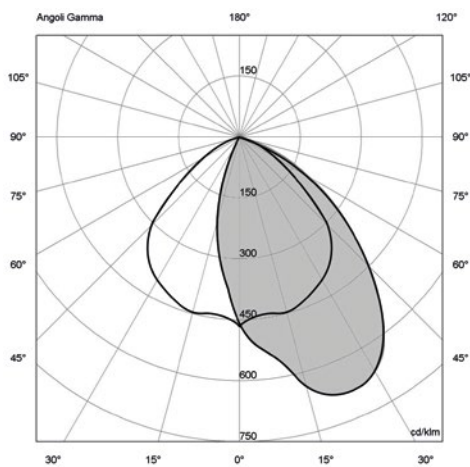

Optic type: Asymetric

Angle: 90°

## OPTIONS



COD. V101  
Vetro infrangibile