

Art.


8060-PR

NANO-PRINCE


Proiettore/Floodlight

series **prince**

Indoor and outdoor LED floodlight.

Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket. Aluminium clips closing.**Standard gear:** electronic ballast 230V.**Louvers and diffusers:** Matt satin symmetric aluminium reflector.


MADE IN ITALY

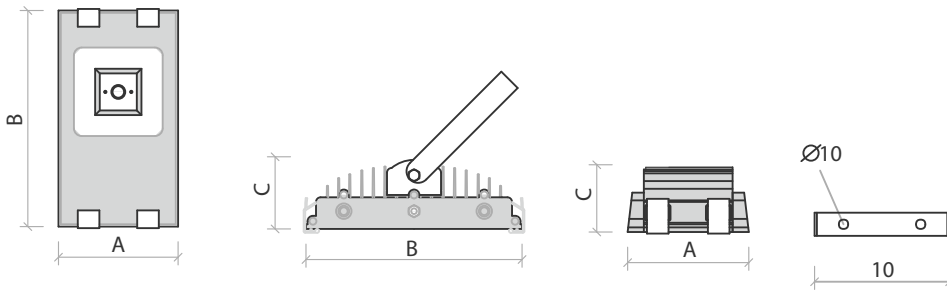

MOD.	Wtot	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
PR	30	8060PR4030EL	1 led HP	4000	3556	3022	155	280	100	2,3	0,012	1	90
	30	8060PR5030EL	1 led HP	5000	3599	3059	155	280	100	2,3	0,012	1	90
	40	8060PR4040EL	1 led HP	4000	5081	4318	155	280	100	2,3	0,012	1	90
	40	8060PR5040EL	1 led HP	5000	5153	4380	155	280	100	2,3	0,012	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+45°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

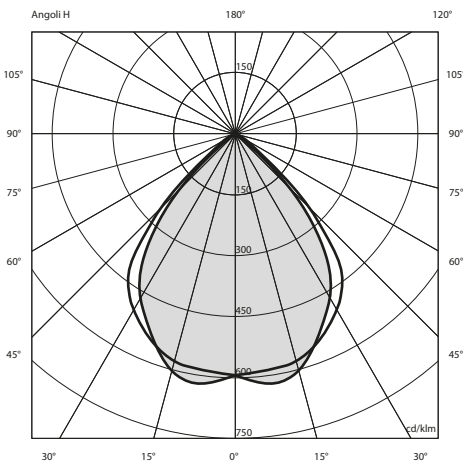

Optic type: Symetric

Angle: 90°

OPTIONS

COD. V101
Vetro infrangibile

TEC-MAR®