
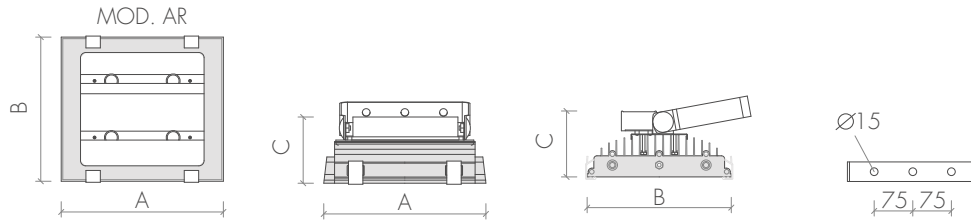


Indoor and outdoor LED floodlight.

**Body:** trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket.

**Standard gear:** electronic ballast 230V.


**Louvers and diffusers:** Matt satin symmetric aluminium reflector.



| MOD. | W   | Cod. EL      | lamp     | °K   | Lm (Tc=25°) | Lm (Output) | A   | B   | C   | Kg  | mc    |   |    |
|------|-----|--------------|----------|------|-------------|-------------|-----|-----|-----|-----|-------|---|----|
| AR   | 230 | 8098AR4230EL | 4 led HP | 4000 | 30676       | 24540       | 315 | 280 | 150 | 6,5 | 0,022 | 1 | 90 |
|      | 230 | 8098AR5230EL | 4 led HP | 5000 | 31052       | 24841       | 315 | 280 | 150 | 6,5 | 0,022 | 1 | 90 |

| OPERATING TEMP. | CRI (RA) | LIFE (h) | DEGRADATION INDEX | POWER SUPPLY     | NORMS                 |
|-----------------|----------|----------|-------------------|------------------|-----------------------|
| -30+50°C        | 80       | >50 000h | L70 - LM80-TM21   | 230-240V 50/60Hz | EN / IEC 60598-1:2008 |

## PHOTOMETRIC DATA

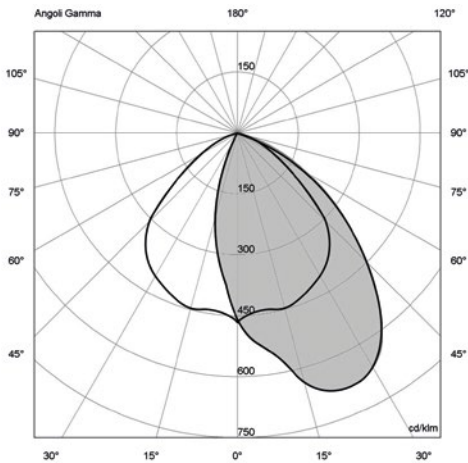

Optic type: Asymmetric

Angle: 90°

## OPTIONS



COD. VI01  
Vetro infrangibile



COD. AP01  
Attacco palo



COD. IM  
Alimentatore Dimmerabile 1-10V