
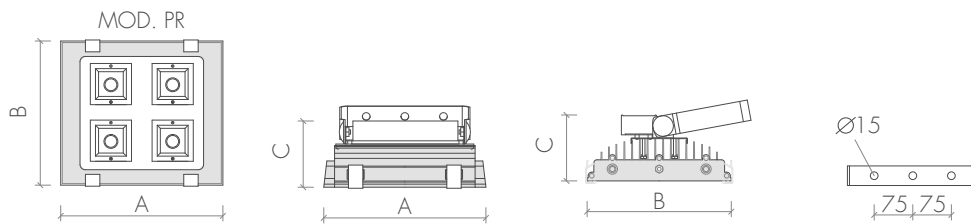


Indoor and outdoor LED floodlight.

Body: trafilated aluminium oxydate, tempered transparent glass mm 5 thickness, silicon gasket.

Standard gear: electronic ballast 230V.


Louvers and diffusers: Matt satin symmetric aluminium reflector.



MOD.	W	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
PR	230	8098PR4230EL	4 led HP	4000	30676	26074	315	280	150	6,5	0,022	1	90
	230	8098PR5230EL	4 led HP	5000	31052	26394	315	280	150	6,5	0,022	1	90

OPERATING TEMP.	CRI (RA)	LIFE (h)	DEGRADATION INDEX	POWER SUPPLY	NORMS
-30+50°C	80	>50 000h	L70 - LM80-TM21	230-240V 50/60Hz	EN / IEC 60598-1:2008

PHOTOMETRIC DATA

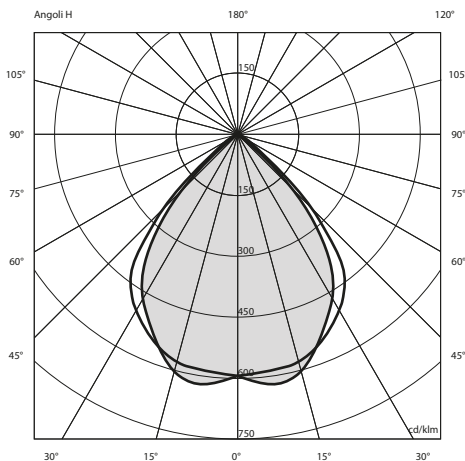

Optic type: Asymmetric

Angle: 90°

OPTIONS



COD. VIO1
Vetro infrangibile



COD. APO1
Attacco palo



COD. IM
Alimentatore Dimmerabile 1-10V