



RECOMMENDED LIGHT FIXTURE



VENUS BIL (Page 324).



WOOD FINISHING



STAINLESS STEEL FINISHING

LIGHT FIXTURE HEIGHT

4,1 m.

TOTAL HEIGHT

4,2 m.

POLE

Coliseo 3,5 m. Page 399.

LIGHT FIXTURE

Cónica BIL. Page 217.

PHOTOMETRIC STUDY - ISOLUX DIAGRAM

PROJECT SITUATION

E1.
LIGHTING CLASS
S2.

OPTIC

Integral block (IB). Page 337.

GEAR

50W HPS.

INTER-DISTANCE

13 m.

INSTALLATION HEIGHT

4,1 m.

STREET WIDTH

4,5 m.

NUMBER OF LANES

1.

AVERAGE ILLUMINANCE

10,9 lux.

MINIMUM ILLUMINANCE

3,1 lux.

AVERAGE ILLUMINANCE UNIFORMITY

AVERAGE LUMINANCE

GLOBAL LUMINANCE UNIFORMITY

LONGITUDINAL UNIFORMITY

THRESHOLD INCREMENT

SURROUND RATIO (SR)

ENERGY CLASSIFICATION

A.



CLASS II.

Page 420.

AENOR.

Page 12.

CE.

Page 12.

Ø COUPLING: 50, 60 or 75 mm. Page 421.

TECHNICAL CHARACTERISTICS. Page 420.

FIXING.

Fixing System AGM, AGL or AG. Page 422.

GUARANTEE.

10 YEARS. Page 13.

COLOURS.

Page 424.



*Installation with mounted street light fixtures or with less than 1 m. bracket expansion.

**Installation with mounted street light fixtures or with less than 1,5 m. bracket expansion.

Optional finishing in Stainless Steel for Ø 75 mm and wood up to Ø 120 mm. Consult Price. Page 420.




Optional base: Int. 400 x 400 mm.



Optional base



Enlarged view.

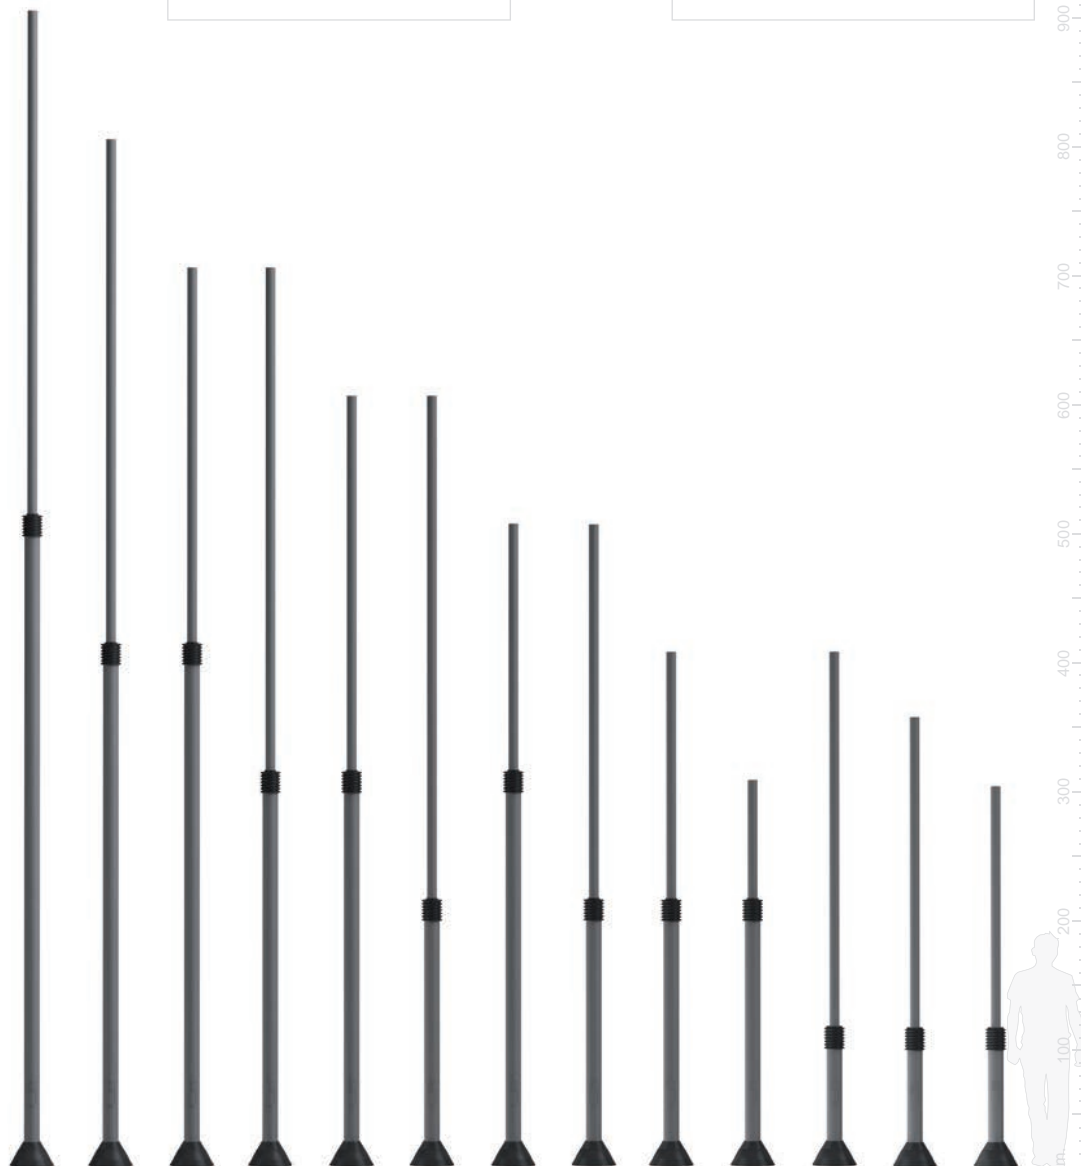

Height	9m(5+4)*	8m(4+4)*	7m(4+3)**	7m(3+4)*	6m(3+3)**	6m(2+4)*	5m(3+2)	5m(2+3)**	4m(2+2)	3m(2+1)	4m(1+3)	3,5m(1+2,5)	3m(1+2)
Fixing	AGL	AGL	AGL	AGL	AGL	AGM	AGL	AGM	AGM	AGM	AG	AG	AG
Reference	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI	CLI
	090	080	070-B	070	060-B	060	050-B	050	040-B	030-B	040	035	030
Price (€)	1492	1302	1226	1109	1034	919	912	837	729	661	645	605	563