




WS-STAD Gen7

Increased light performance & integrated RS technology

AAA-LUX' Generation 7 combines an increased light output with the ability to reduce obtrusive light in the surrounding area. The low amount of luminaires needed to meet lighting requirements, is truly a breakthrough in lighting technology.

Thanks to the integrated RS technology the luminaire is prepared for optimum reduction of obtrusive light, by mounting light shields (LS).

Mechanical Technical Information

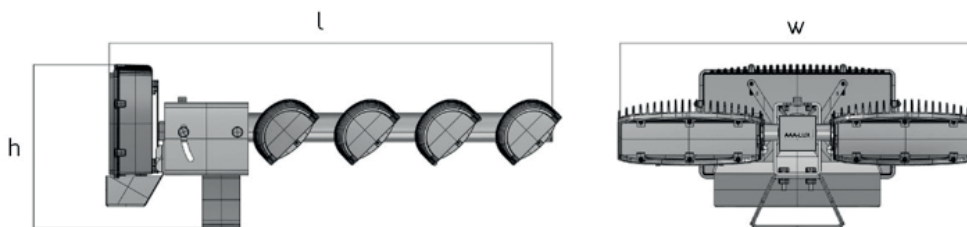

LUMINAIRE TYPE	LUMINOUS FLUX (based on lm-79 measurements by DEKRA) [lm]			DIMENSIONS [mm]		
	ST	MP	HT	L1	W1	H1
WS-STAD-01	194100	207700	176650	900	650	320
WS-STAD-02	193750	207300	176300			
WS-STAD-03	186700	197500	173450			
WS-STAD-05	179250	---	161300			

FEATURES



Less luminaires needed
Lowest total project cost
Re-use infrastructure



Wireless dimming
Remote monitoring
Smart City








Ease of installation







Reduced Spill light
CIE150 compliant

Specifications

All models				
	Min	Typ	Max	
	Voltage input (VAC)	360	400 ¹ / 415 ³	460
	Power Factor @ 20% - 100%	0.9	0.97	
	Inrush Current	None		
	Color Temperature (K)		5200 ⁶	
	Color Rendering Index (CRI)	70	75	
	Expected lifetime (hours) lm-79	60 000		
	Luminous efficacy (lm/W)	110		
	Weight, including Driver (kg)		23	
	Frontal surface [CW = 1] @tilt 15° (m2)		0.22 ⁵	
	Ingress protection (IP)		66 ²	
	Over voltage (kV)			6
	Electrical Insulation Class		I	
	Product Color	RAL7015 / Pantone 446 C / Uncoated		

Standard (ST)				
	Min	Typ	Max	
	Power Consumption @ 100%		1550	1600
	Current (A)		3.9	4,3
	Ambient Operating Temperature (°C) ⁴	-30	30	

High temperature (HT)				
	Min	Typ	Max	
	Power Consumption @ 100%		1350	1425
	Current (A)		3.4	3.9
	Ambient Operating Temperature (°C) ⁴	-30	40	

Maximum Power (MP)				
	Min	Typ	Max	
	Power Consumption @ 100%		1700	1750
	Current (A)		4,3	4,8
	Ambient Operating Temperature (°C) ⁴	-30	25	

¹ 230VAC also available upon request

³ Australia/New Zealand

⁵ TP26 for more details

² Dali, DMX and Modbus version IP 65

⁴ Auto dimming may occur

⁶ WS STAD-05: 5700K

Compliance To Standards

Safety

IEC 60598-1:2014	Luminaires - Part 1: General requirements and tests
IEC 60598-2-5:2015	Luminaires - Part 2-5: Particular requirements - Floodlights
IEC 62471:2008	Photobiological safety of lamps and lamp systems
IEC 60529	Degrees of protection provided by enclosures (IP Code)
IEC 62031:2008	LED modules for general lighting - Safety specifications
IEC 61347	Lamp controlgear
EN 55015:2013 +A1:2015	(Generic emissions)
EC 61000-3-2:2014	(Generic emissions)
EN 61000-3-3:2013	(Harmonics)

EN 61547:2009	General lighting purposes - EMC immunity requirements)
---------------	--

Corrosion

DIN 50021 N55
DIN 50018 SWF 2.0
NFT 30.055 2 liter S02

