Art. 8095-AR

PRINCE

Proiettore/Floodlight

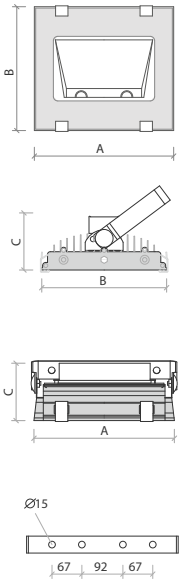

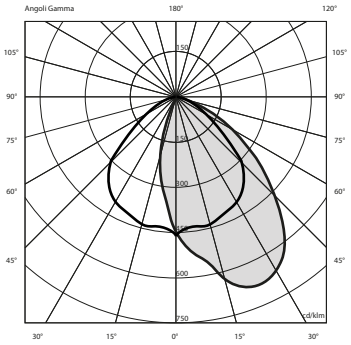

Download LDT file from www.tec-mar.it



IP65

850°

IK08

RoHS Compilant

series prince

made in Italy

TECHNICAL DATA

General information	Power supply:	220-240V - 50/60Hz
	Protection index:	IP65
	Power factor:	0,97 (cos phi)
	Ballast:	Elettronic ballast
	Material body:	Trafilated aluminium oxidate
	Glass:	Temperated transparent glass. Thickness 5mm
	Installation:	Bracket installation
	Operating temperature:	-30+45°C
LED	Tecnology:	LED Lighting
	CRI (Ra):	>80
	Life time extimated (h):	>50.000 h
	Degradation index:	(L70 = 130.000h) (L80 = 75.000h)
	Lm/W:	150
Optics	Light diffusion:	Direct light
	Optics type:	AR - Asymmetric floodlight
	Optics angle:	90°
Norms	Norms:	EN / IEC 60598-1:2008
	Eyesafety (IEC 62471):	Risk group exempt

OPTIONS

	VI8095 Shatterproof glass
	AP8095 Pole bracket
	LM8095 Dimmerable 1-10V electronic ballast
	LD8095 Dimmerabile Dali Driver ballast for LED
	E18095 Emergency Kit 1 hour for LED
3000K	3K8095 LED color 3000K

VS	VS8095 Vetro sabbiato

MOD.	Wtot	Cod. EL	lamp	°K	Lm (Tc=25°)	Lm (Output)	A	B	C	Kg	mc		
AR	120	8095AR4120EL	2 led HP	4000	19486	14689	315	280	150	6,5	0,022	1	50
	120	8095AR5120EL	2 led HP	5000	19682	14862	315	280	150	6,5	0,022	1	50
	150	8095AR4150EL	2 led HP	4000	23548	17750	315	280	150	6,5	0,022	1	50
	150	8095AR5150EL	2 led HP	5000	23784	17960	315	280	150	6,5	0,022	1	50
	185	8095AR4185EL	2 led HP	4000	27840	20985	315	280	150	6,5	0,022	1	50
	185	8095AR5185EL	2 led HP	5000	28120	21233	315	280	150	6,5	0,022	1	50
	200	8095AR4200EL	2 led HP	4000	29732	22414	315	280	150	6,5	0,022	1	50
	200	8095AR5200EL	2 led HP	5000	30032	22678	315	280	150	6,5	0,022	1	50

*The flux may vary from -5/+5% compared to the real.

TEC-MAR®