
**TZERO-HID-AS-IN 100W**
**MAIN FEATURES**

<b>Applications</b>	Tunnel entry, exit
<b>Optic</b>	Asymmetrical (counter beam)
<b>Lamp power</b>	100W
<b>Lamp type</b>	SHP super
<b>Lamp holder</b>	E40
<b>Insulation class</b>	I
<b>Protection degree</b>	IP66
<b>Gear tray extraction</b>	Internal power supply unit, extraction without use of tools
<b>Lamp substitution</b>	Without use of tools
<b>Dimensions</b>	656x460x173mm
<b>Main reference standard</b>	EN 60598-1, EN 60598-2-3, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3




IP66

**ELECTRICAL FEATURES**

<b>Rated voltage</b>	230V 50Hz
<b>Rated power</b>	113W
<b>Internal wiring</b>	Halogen free, silicone, double insulation, 1mm <sup>2</sup>
<b>Ignitor</b>	Timed
<b>Connection</b>	Pass through
<b>Cable clamp</b>	2 x M.32 x 1.5 plastic
<b>Terminal board</b>	5 poles on DIN guide 10mm <sup>2</sup>
<b>MCB</b>	1P+neutral, 4A, C curve

**MATERIALS**

<b>Frame</b>	Stainless steel AISI 316L Thickness 1.0mm
<b>Closing hooks</b>	Stainless steel AISI 316L
<b>Optic</b>	Metallized aluminium 99.85%
<b>Screen</b>	Flat tempered glass 6mm
<b>Closing screen</b>	Silicone gasket
<b>Lamp holder</b>	Plastic
<b>Impact protection</b>	IK08

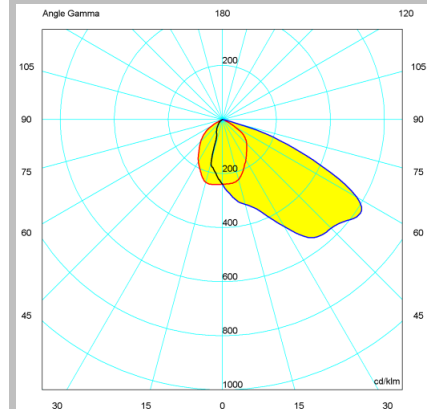

All the published photometrical data has been obtained according to EN 13032-1